

Ref. : PVS 4240S

Rev. : Initial

Date : 21/02/2017

Page : 1/1

AIR RELEASE VALVE SINGLE CHAMBER SINGLE FUNCTION PN10/16

PVS 4240S



Tecofi'
VALVE DESIGNER - FRANCE

APPLICATION

General use : discharge of the small bubbles of air that are located in the top of the pipes to improve the circulation of the fluid.

GENERAL CHARACTERISTICS

Dimensions : from DN 25 to DN 150.

Powder epoxy coated body, 250 micron thickness - DIN30677.

CONSTRUCTION

6	Orifice cover	ABS
5	Seat valve	NBR
4	Valve outlet	ABS
3	Float and level	ABS
2	Cover	Ductile iron GGG 40
1	Body	Ductile iron GGG 40
Pos.	Description	Material

DIMENSIONS

DN		A	L	Weight (kg)
mm	inch			
25	1"	140	200	6,10
40	1"	140	200	6,80
50	1"	140	200	7,60
40/50/65	1"	140	200	7,70
80	1"	140	200	9,00
100	1"	140	200	11,00
150	1"	140	200	16,00


WORKING CONDITIONS

Maximum temperature: +80°C.

Maximum working pressure :16 bar.

STANDARDS

Connection with flange PN10/16 according to EN 1092-2.

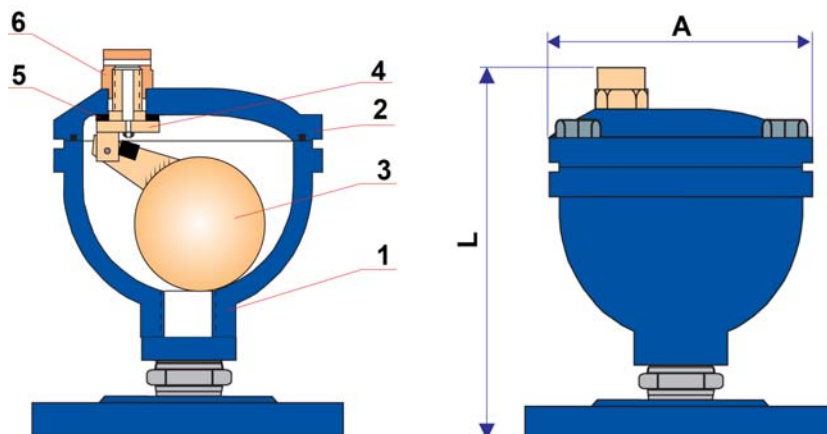

Flow capacity

