

Ref. : CA 4260.pas

Rev. : B

Date : 23/10/2019

Page : 1/1

FLANGED PN40 QUICK CLOSING AXIAL NON RETURN VALVE

CA 4260



Tecofi'
VALVE DESIGNER - FRANCE



APPLICATION

General use: distribution networks, water supply, pumping system, irrigation, station feeding, industrial processes etc.

GENERAL CHARACTERISTICS

Range from DN 600 to DN 1600.
Excellent sealing.
Low pressure drop.
Extremely fast closure to avoid water hammer.
Reliable and quiet operation thanks the polyurethane disc.
Simplicity of installation.

CONSTRUCTION

5	Joint	NBR
4	Spring	Stainless steel 302
3	Disc	Polyuréthane
2	Ring	Ductile iron GGG40*
1	Body	Ductile iron GGG40*
Pos.	Description	Material

*- Ductile iron GGG60 upon request.

DIMENSIONS

DN		L	Ø K	Weight (kg)
mm	inch			
600	24"	435	795	500
700	28"	500	900	800
800	32"	515	1030	1000
900	36"	710	1140	1700
1000	40"	730	1250	1900
1200	48"	900	1460	3400
1400	56"	1120	1680	5400
1600	64"	1352	1900	8100

WORKING CONDITIONS

Maximum working pressure : 40 bar


Working temperature : +60°C.

STANDARDS


Flanges according to EN 1092-2 and DIN 2501/1 : ISO PN40.
Attestation of health conformity
ACS n° 19 ACC LY 031.



ACS

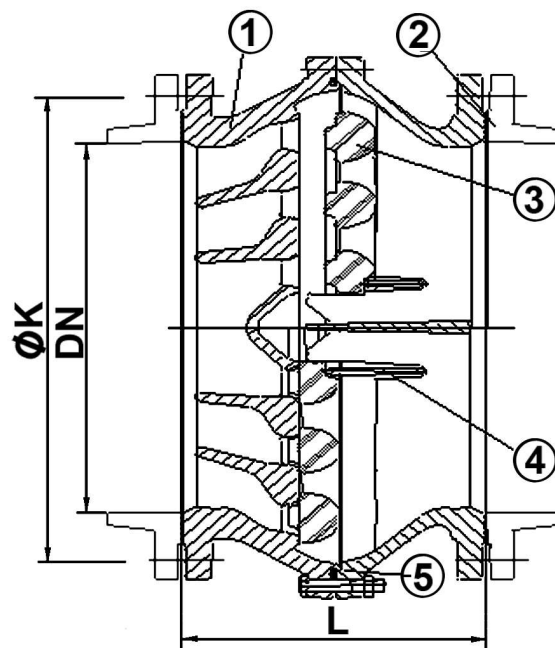

Head losses

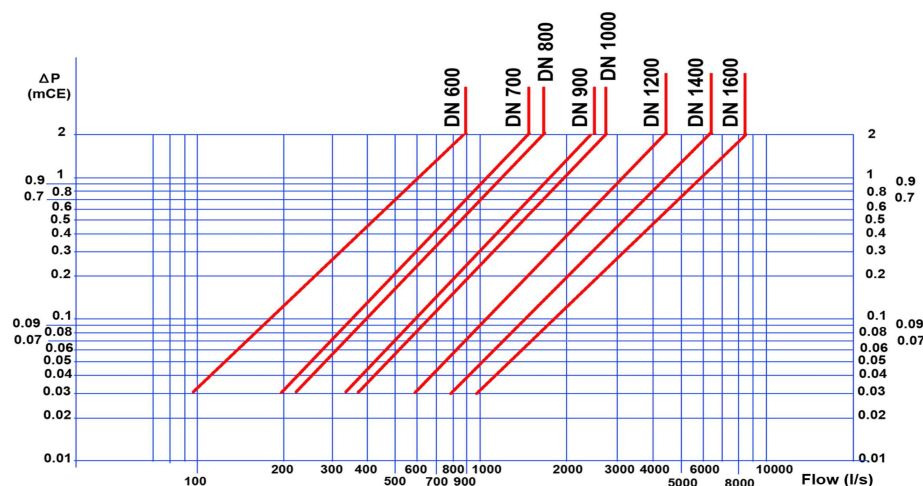

TECOFI France - 83, Rue Marcel Mérieux 69960 Corbas - FRANCE
Tél. +33 (0) 4 72 79 05 79 - Fax +33 (0) 4 78 90 19 19 / +33 (0) 4 72 79 05 70
Adresses e-mail : sales@tecofi.fr ; tecofi@tecofi.fr / Site web : www.tecofi.fr