

Ref. : CS 2142.pas

Rev. : E

Date : 20/11/2013

Page : 1/1

THREADED TYPE LIFT CHECK VALVE

CS 2142



Tecofi'
VALVE DESIGNER - FRANCE

APPLICATION


General uses : Water and saturated steam.

GENERAL CHARACTERISTICS

Range : from DN 1/4" up to DN 2"

CONSTRUCTION

5	1	Spring	Stainless steel
4	1	Stem	Stainless steel
3	1	Tightness	Stainless steel – Stainless steel
2	1	Bonnet	Brass (DN1/4" – 1"1/2) Bronze (DN2")
1	1	Body	Bronze
Pos.	Qty.	Description	Material

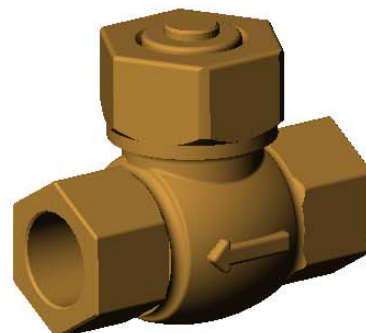

DIMENSIONS

DN inch	L	H	Weight (kg)
1/4"	46	30	0.197
3/8"	46	30	0.202
1/2"	56	35	0.281
3/4"	62	45	0.504
1"	74	50	0.727
1"1/4	91	60	1.164
1"1/2	100	65	1.504
2"	128	80	2.508

WORKING CONDITIONS

Maximum working pressure : 25 bar.
Maximum temperature : +180°C.

AGREEMENT AND TESTING

Test procedures are established according to
NF EN 12266-1, DIN3230, ISO 5208.
BSP threaded according to ISO 228.

